

AETES

28V DC POWER SUPPLY

Wide Temperature Range
Industrial Grade Design
Five Years Warranty





"...power alliance..."

Specification

MODEL		230-28-1200W	230-28-1800W	230-28-2400W
ITEMS				
Input Voltage range	-	85 - 265V AC (47 - 63Hz)		
Output Voltage	-	28V DC		
Input Current (230V AC)	-	7,2A	11A	15A
Max. Output Current (DC)	-	40A	60A	80A
Power Factor	-	0.9 (Meets EN61000-3-2 Class A)		
Overcurrent Protection	-	>105%, Constant current style		
Overvoltage Protection	V	125% -140%		
Over temperature Protection	-	Yes, cycle AC		
Hold Up Time (Typ)	ms	20ms at 115/230VAC		
Efficiency (230VAC)	%	88.5		
Load Regulation (max.)	mV	193		
Line Regulation (max.)	mV	98		
Ripple Noise (max.)	mV	160		
Remote On/Off (CNT)	-	Optionally		
DC Good & Fan Fail Signal	-	Optionally		
Military Type Socket	-	Optionally		
Enclosure Color	-	Grey		
Operating Temperature	-	-20°C to 70°C, derating linearly to 50% load above 50°C		
Storage Temperature	-	-30°C to +75°C		
Humidity (non condensing)	-	30 - 90% RH operating, 10 - 90%RH non operating		
Cooling	-	Internal fan		
Withstand Voltage(One minute)	-	Input to Ground 2kVAC, Input to Output 3kVAC, Output to Ground 500VAC, Output to CNT 100VAC		
Isolation Resistance	-	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC		
Vibration (non operating)	-	MIL-STD-810F 514.5 CAT. 4,10		
Shock	-	<196.1 m/s ²		
Immunity Compatibility	-	EN61000-4 - 2 -3 -4 -5 -6 -8 -11		
Safety Compatibility	-	EN60950-1		
Conducted & Radiated EMI	-	EN55011 / EN55022-B, FCC Class B		
Weight (Typ)		5,5 kg	8 kg	10,5 kg
Size (D x H x W)	mm	270 x 140 x 165	270 x 140 x 315	270 x 140 x 315
Warranty	yrs	5		

"...power alliance..."

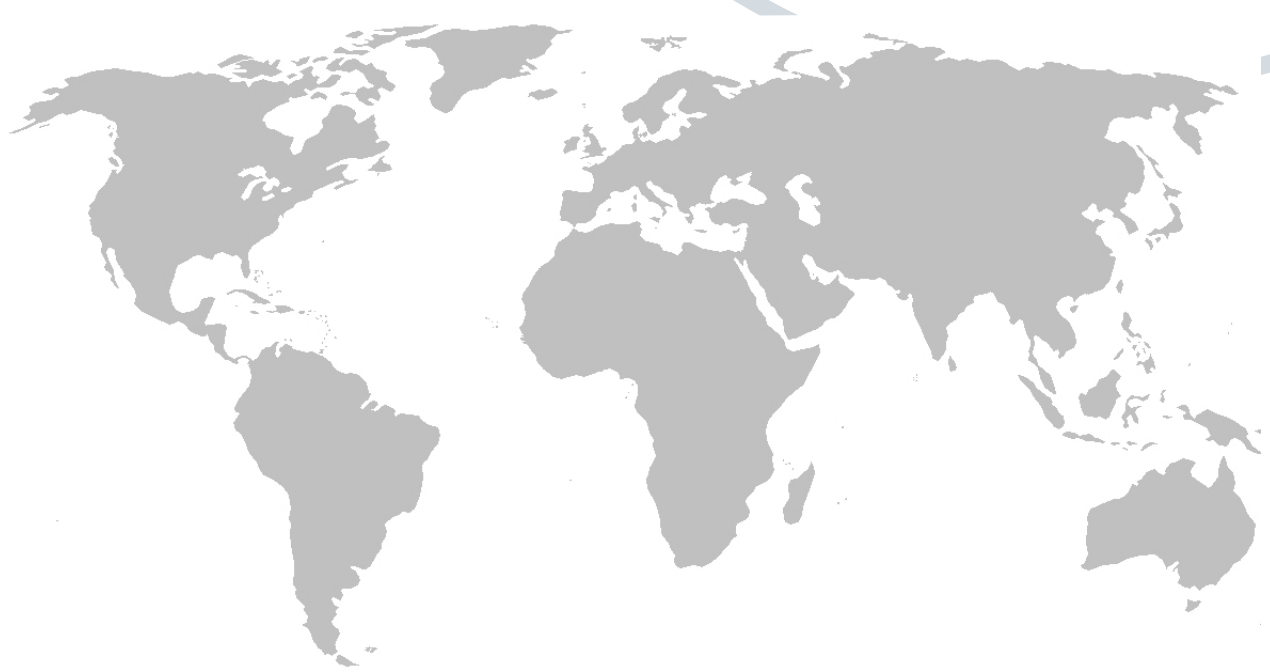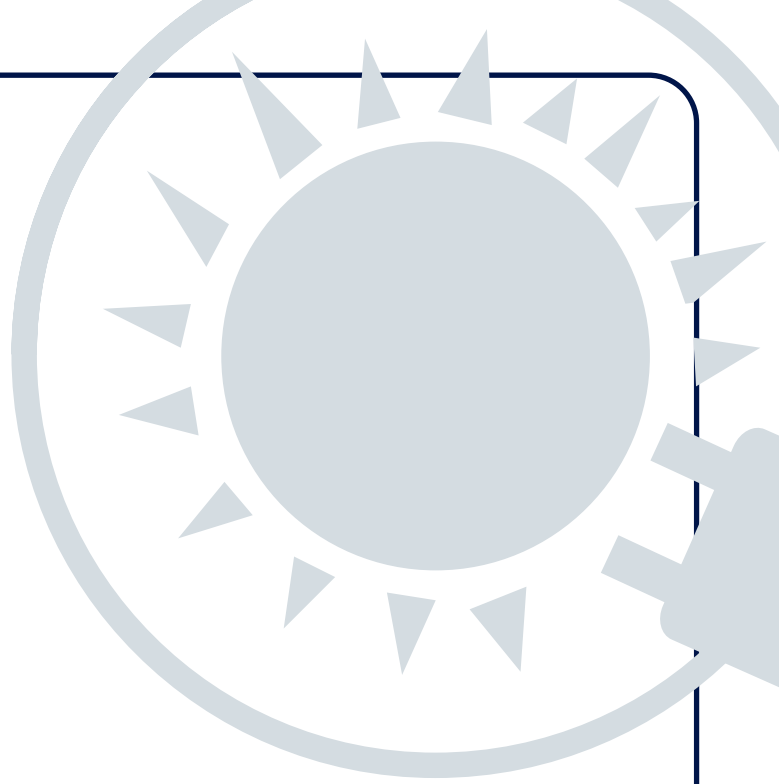

AETES
"...power alliance..."

The specifications, drawings and images indicated in this document are based on current information. All content is subject to modifications or additions. For more information on our local sales offices, visit us at our website below.