

AETES

GOLDEN SERIES 16A PDU

Basic Rack PDU

IEC 230V AC 1PH 16A

Rackmount 1U Compact Design



"...power alliance..."

DESCRIPTION

AETES Golden series 16A basic rack PDU's are designed to provide high reliability and quality. Golden series offer input power cords, input plugs and versatile configuration options; and features a rugged aluminium casing to ensure maximum durability. It occupies one rack unit (1U) and measures only 220mm depth. Unfiltered electrical pass-through is ideal for distributing AC power in rack enclosures network closets and more. Includes 2mt power jumper cord, IEC C19 to C20.

FEATURES

- * Customizable, Local-Stock, and Fast Delivery
- * Adjustable Depth Brackets for 19" Horizontal Rack Mounting
- * Flexible tool-less and hard fix mounting accessories included
- * Coated Black/Gold Finish

OPTIONS

- * Various Outlet Configurations; IEC / NEMA
- * IEC Jumper Cords for PDU to Loads

OUTLET TYPES



IEC-320 C13



IEC-320 C19



NEMA 5-15R

MODELS

| | AG2260 | AG2260-F | AG2260-S |
|-------------------------------|---------------------|---------------------|---------------------|
| Input Voltage (AC) | 230V | 230V | 230V |
| Voltage Range | 200–240V | 200–240V | 200–240V |
| Nominal Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Current (Maximum) | 16A | 16A | 16A |
| Power Inlet | IEC320-C20 | IEC320-C20 | IEC320-C20 |
| Input Power Cord | 2m(6-ft) C19 to C20 | 2m(6-ft) C19 to C20 | 2m(6-ft) C19 to C20 |
| Internal Filter | - | EMI / RFI | - |
| Output Receptacles | (12) IEC320-C13 | (12) IEC320-C13 | (12) IEC320-C13 |
| Surge Protection | - | - | 10-20kA |
| Overload Protection (Thermal) | 20A | 20A | 20A |
| Output Jumper Cables | (Option) | (Option) | (Option) |
| Light Indicator | | Power ON | |
| Protection Level | | IP20 | |

GENERAL SPECIFICATION


Environmental and Safety

| | |
|------------------------|---|
| Operating Temperature | 0°C to 50°C (32°F to 122°F) |
| Relative Humidity | 20–80% noncondensing |
| Operating Altitude | Up to 3,000 meters above sea level |
| Non-operating Altitude | Up to 9,000 meters above sea level |
| Compatibility | IEC950 / EN-50091-1 / EN-60950 or UL 1363 |
| Standard Warranty | 5 year Repair or Replace |

Shipping Weight and Dimensions

| | |
|------------------------------------|-----------------|
| Shipping Weight | 1.8 kg |
| Shipping Dimensions (mm) | 550 x 110 x 250 |
| Mechanical Dimensions (WxHxD) (mm) | 440 x 44 x 220 |

"...power alliance..."

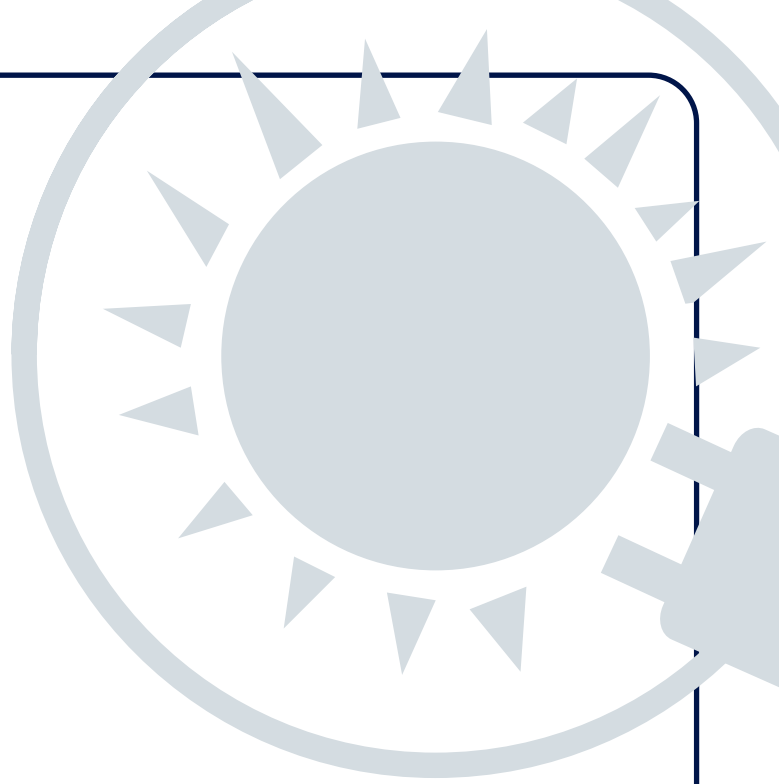

AETES
"...power alliance..."

The specifications, drawings and images indicated in this document are based on current information. All content is subject to modifications or additions. For more information on our local sales offices, visit us at our website below.