

AETES

GOLDEN SERIES 32A PDU

Basic Rack PDU

IEC 230V AC 1PH 32A

Rackmount 1U Compact Design



"...power alliance..."

DESCRIPTION

AETES Golden series basic rack 32A PDU's are designed to high reliability and quality. Golden series offer input provide power cords, input plugs and versatile configuration options; and features a rugged aluminium casing to ensure maximum durability. It occupies one rack unit (1U) and measures only 220mm depth. Unfiltered electrical pass-through is ideal for distributing AC power in rack enclosures network closets and more. Includes 2mt power cord open-end and optional plugs.

FEATURES

- * Customizable, Local-Stock, and Fast Delivery
- * Adjustable Depth Brackets for 19" Horizontal Rack Mounting
- * Flexible tool-less and hard fix mounting accessories included
- * Coated Black/Gold Finish

OPTIONS

- * Internal EMI Line Filters
- * Various Outlet Configurations
- * Output Thermal Breakers for Overcurrent Protection
- * IEC Jumper Cords for PDU to Loads

OUTLET TYPES



IEC-320 C13



IEC-320 C19



NEMA 5-15R

MODELS

	AG2406	AG2442	AG2461
Input Voltage (AC)	230V	230V	230V
Voltage Range	200–240V	200–240V	200–240V
Nominal Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Current (Maximum)	32A	32A	32A
Power Plug	IEC309-32A	IEC309-32A	IEC309-32A
Input Power Cord	2m(6-ft)	2m(6-ft)	2m(6-ft)
Internal EMI Filter	(Option)	(Option)	(Option)
Output Receptacles	(6) IEC320-C19	(2) IEC320-C19 (8) IEC320-C13	(1) IEC320-C19 (12) IEC320-C13
Overload Protection (Thermal)	(Option)	(Option)	40A
Output Jumper Cables	(Option)	(Option)	(Option)
Light Indicator		Power ON	
Protection Level		IP20	

GENERAL SPECIFICATION


Environmental and Safety

Operating Temperature	0°C to 50°C (32°F to 122°F)
Relative Humidity	20–80% noncondensing
Operating Altitude	Up to 3,000 meters above sea level
Non-operating Altitude	Up to 9,000 meters above sea level
Compatibility	IEC950 / EN-50091-1 / EN-60950 or UL 1363
Standard Warranty	5 year Repair or Replace

Shipping Weight and Dimensions

Shipping Weight (lbs/kgs)	6.5 / 2.9
Shipping Dimensions (mm)	550 x 110 x 250
Mechanical Dimensions (WxHxD) (mm)	440 x 44 x 220

"...power alliance..."

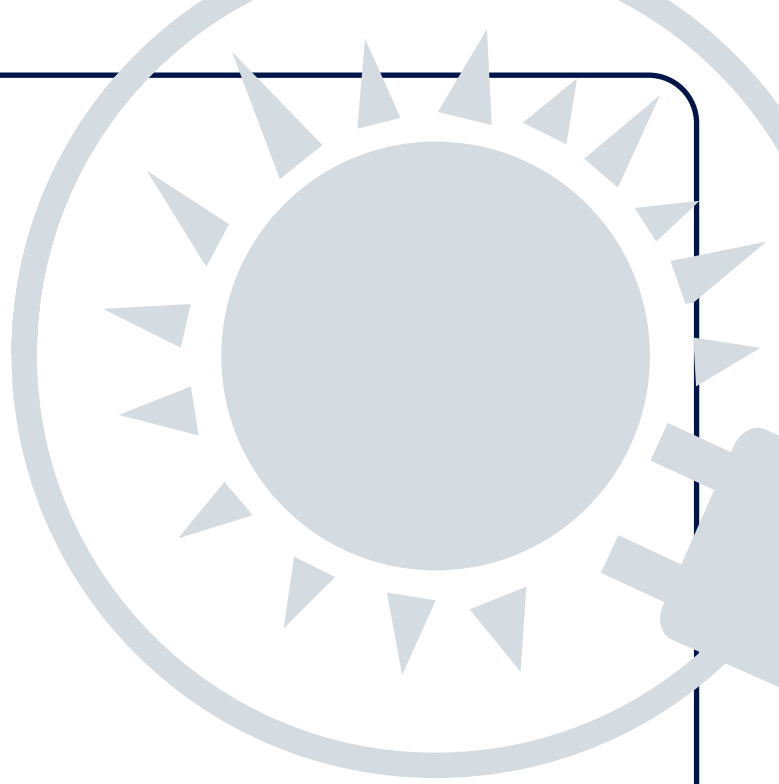

AETES
"...power alliance..."

The specifications, drawings and images indicated in this document are based on current information. All content is subject to modifications or additions. For more information on our local sales offices, visit us at our website below.