

AETES

220VDC / 130VDC Converter

Power Boost of 150% for 5s
Industrial Grade Design
Small Size Enclosure




"...power alliance..."



Specification

ITEMS	MODEL	CPM-220-130-1200	CPM-220-130-2400
Input Voltage Range		220VDC (140V...320V DC)	
Max. Input Current (220VDC)		7A (Cold Start Inrush; max. 40A)	14A (Cold Start Inrush; max. 90A)
Output Voltage		130VDC	
Max. Output Current		10A (1200 Watt)	20A (2400 Watt)
Output Power Reserve		150% peak load for 5 seconds at <45°C	
Overcurrent Protection		>105-150%, Constant current style	
Overvoltage Protection		125-140%	
OverTemperature Protection		Yes	
Hold Up Time (Typ)		20ms	
Efficiency (220VDC)		< 87 %	
Load Regulation (max.)		864 mV	
Line Regulation (max.)		576 mV	
Ripple Noise (max.)		900 mV	
Remote On/Off		Optionally	
Status Indicator & Dry Contact		Optionally	
Multiple Output Voltage		Optionally (Vout1=130V Vout2= 5V.../60V)	
Enclosure Color		Grey (RAL 7035)	
Operating Temperature		-20°C to +70°C, derating linearly to 50% load above +50°C	
Storage Temperature		-30°C to +75°C	
Humidity (non condensing)		30-90% RH operating, 10-90% RH non operating	
Cooling		Internal fan	
Withstand Voltage (1 min.)		Input to Ground 2kVAC, Input to Output 3kVAC, Output to Ground 500VAC, Output to CNT 100VAC	
Isolation Resistance		>100MΩ at 25°C & 70%RH, Output to Ground 500VDC	
Vibration Compatibility		MIL-STD-810F 514.5 CAT. 4,10	
Shock Compatibility		<196.1 m/s ²	
Immunity Compatibility		EN61000-4 -2 -3 -4 -5 -6 -8 -11	
Safety Compatibility		EN60950-1	
EMI Compatibility		EN55011 / EN55022-B, FCC Class B	
Weight (Typ)		9,0 kg	13,0 kg
Dimensions		A:125+15 B:250+20 C:315 mm	A:135+15 B:320+20 C:315 mm
Warranty		3-YEAR	

Drawing

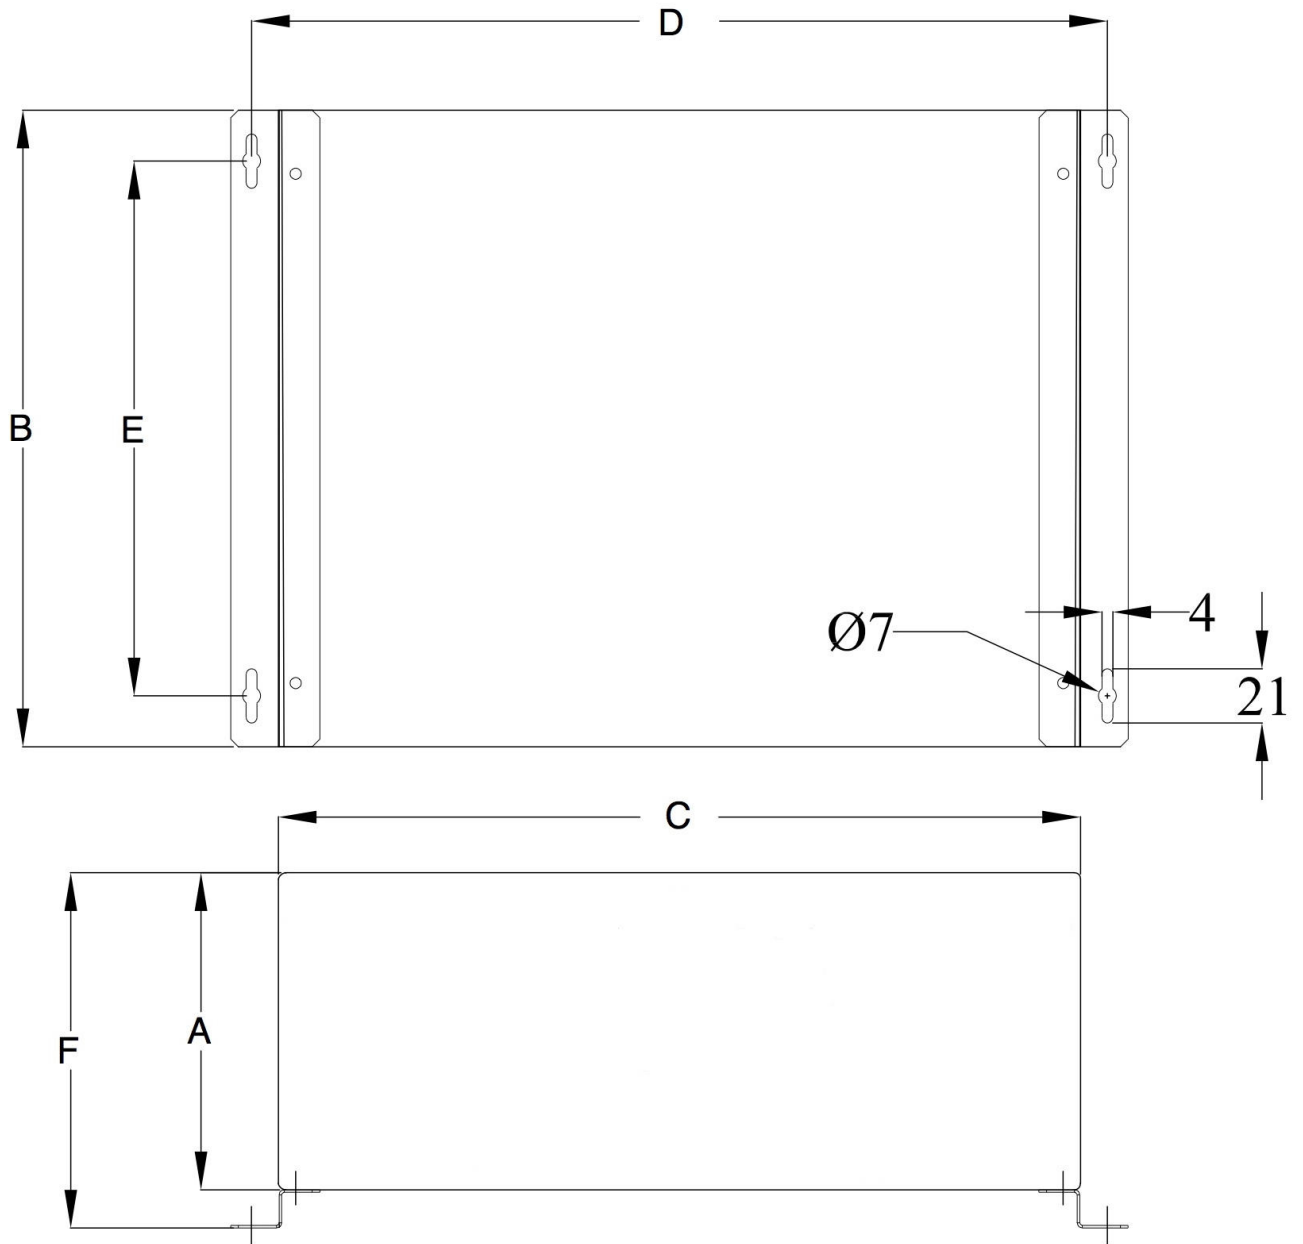

"...power alliance..."

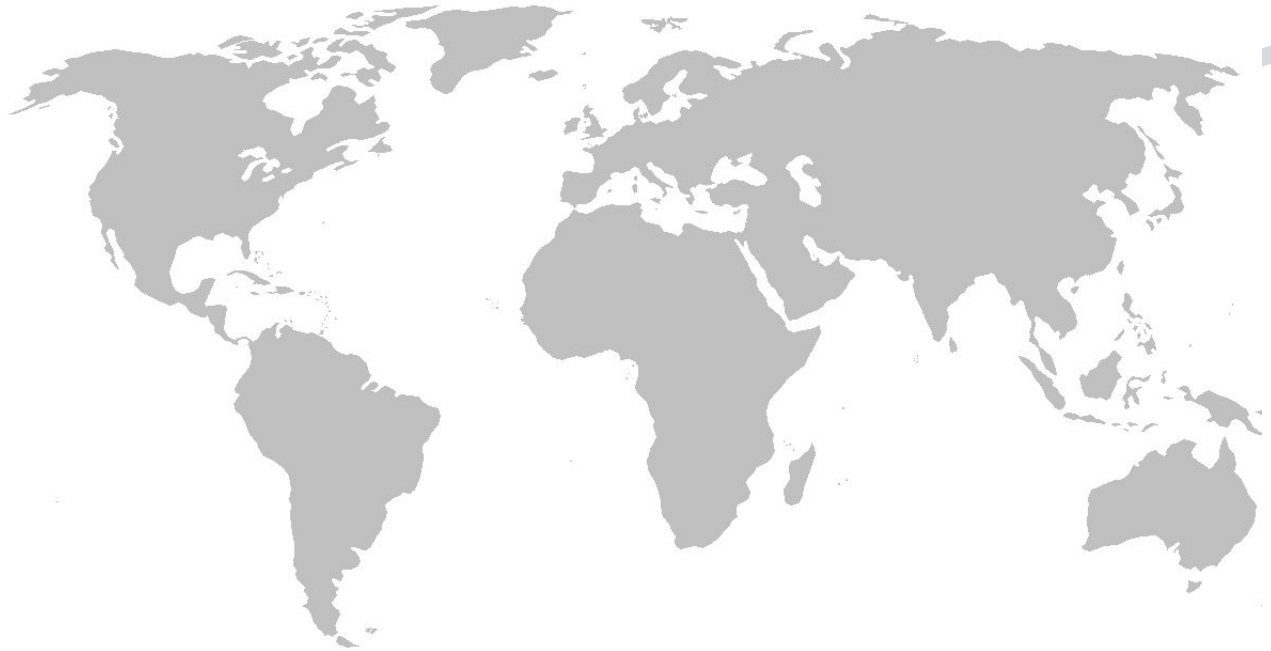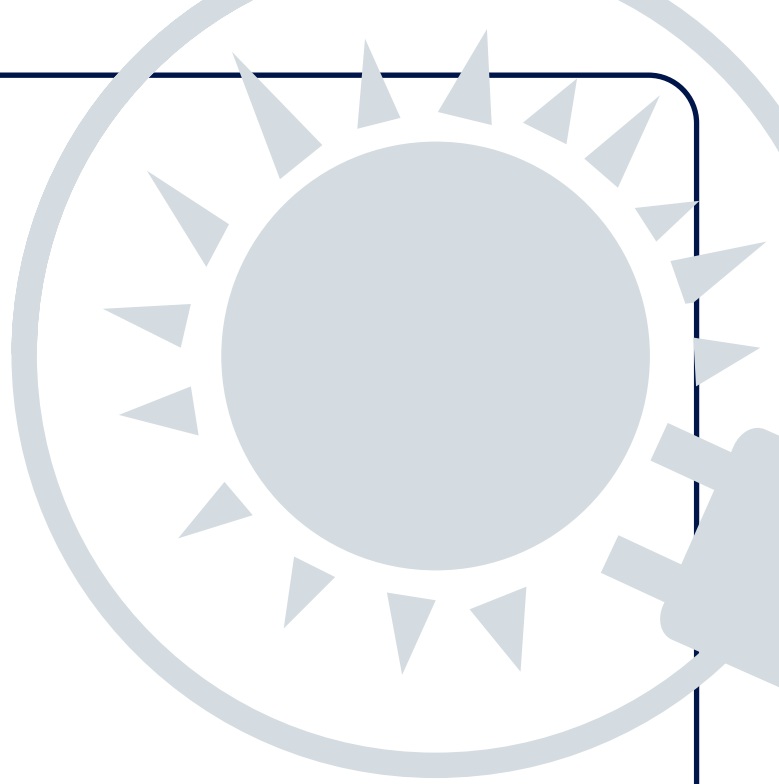

AETES
"...power alliance..."

The specifications, drawings and images indicated in this document are based on current information. All content is subject to modifications or additions. For more information on our local sales offices, visit us at our website below.